

## Power supply box

- -Transformer VAC 220/24 3VA
- -Moulding resin for complete waterproof
- -Weatherproof enclosure IP54
- -Input 220VAC and Output 24VAC



Before mounting the stopwatch, set a location in a dry room or a double-wall to install the transformer.

**IMPORTANT**: 220VAC wiring must not be in the pool space!


## **WARNING:**

-The installation should be installed turned off Use cable 2 wire 0.5 mm<sup>2</sup> / standard H03VVH2-F

Connect a power cable from your network 220VAC/50 Hz on the 220VAC domino in the transformer housing through the cable gland.

The box-transformer 24VAC output is connected to the stopwatch cable 30cm. If this length is insufficient, lengthen the cable according to the desired length.

Make sure to tighten the cables through the cable glands and turn on the network voltage to activate the second account.

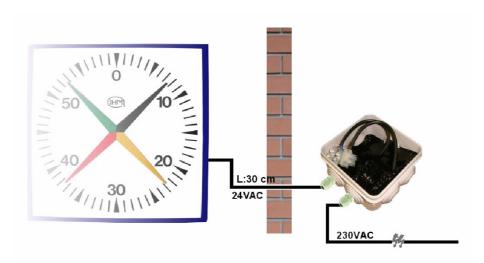

If the clock is run by edge of pool, you will also provide a lengthening of the cable connecting stopwatch to the transformer.

